

# Figure 4<sup>®</sup> Production

Industry's first customizable, fully-integrated factory solution for direct digital production

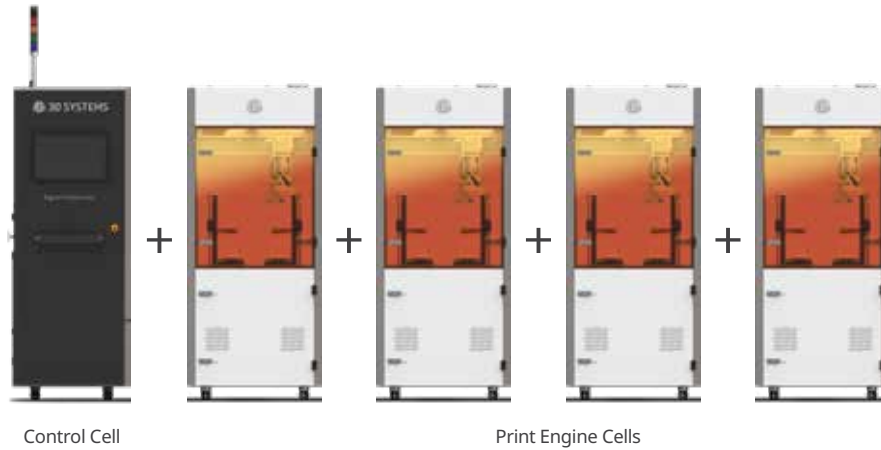


Figure 4 Production combines the design flexibility of additive manufacturing in configurable, in-line production cells to deliver a customizable and automated direct 3D production solution.

# Figure 4<sup>®</sup> Production

Customizable, fully-integrated solution for direct 3D production of 1 million+ parts per year

Figure 4 Production is the industry's first scalable, fully integrated additive manufacturing solution with ultra-fast speed enabling throughput improvement up to 15 times over other 3D printing systems and up to 20 percent lower parts cost compared to traditionally manufactured parts and operations\*. Features like automated printing and material delivery streamline operations and lower total ownership costs.



## LEADING THROUGHPUT

Recent data highlights Figure 4 Production part print speeds up to 65 mm/hour, and prototyping speeds of up to 100 mm/hour. The combination of print automation and light-based UV curing transforms parts production, yielding the world's fastest additive manufacturing throughput, with time-to-part in minutes. In contrast, heat-based curing specialty systems require hours of post-processing in order to achieve a desired part characteristic.

## FLEXIBILITY

Figure 4 Production's scalability and customized configurations enable capacity to meet your present and future needs for unprecedented manufacturing agility. The discrete cells can be placed into automated assembly lines and integrated with secondary processes, including washing, drying and curing.

## AUTOMATION

Figure 4 Production is a customized, integrated digital manufacturing solution with an end-to-end digital printing workflow supported by 3D Systems software. Figure 4 Production features up to 15 times faster print speeds than other 3D printing technologies\* and automated material handling. The combination of automation and part accuracy offers Six Sigma production printing repeatability across all materials.

\* Throughput improvement compared other 3D printing systems based on various use cases on Figure 4 Production; parts cost compared to traditionally manufactured parts and operations at a volume of 500 parts on Figure 4 Production

## FIGURE 4 PRODUCTION RIVALS INJECTION MOLDED PART QUALITY WITH TOOL-LESS DIGITAL PRODUCTION TO DELIVER:




### FLEXIBILITY:

Customize product configurations and materials by application



### AUTOMATION:

High productivity with minimal hands-on processes



### SPEED:

Fast throughput speed for accelerated "parts-in-hand" delivery



### TOTAL COST OF OPERATIONS (TCO):

Up to 20% lower part cost\* with no time of money lost to tooling

# Wide Range of Materials for Application Diversity

3D Systems' Material Design Center has over 30 years of proven R&D experience and process development expertise. The broad and expanding range of Figure 4™ materials addresses a wide variety of applications needs, for functional prototyping, direct production of end-use parts, molding and casting. Figure 4 Production customers also have the option of collaborating with 3D Systems' engineers to create unique materials specifically designed for their application.

## RIGID MATERIALS

Figure 4 rigid materials produce durable plastic parts with the look and feel of cast urethane or injection molded parts, with features that include fast print speeds, high elongation, exceptional impact strength, humidity/moisture resistance, long-term environmental stability and more.



## ELASTOMERIC MATERIALS

Figure 4 elastomeric materials are ideal for the production of functional rubber-like parts with excellent shape recovery, high tear strength, great for compressive applications and material malleability



## HIGH TEMPERATURE MATERIAL

With heat deflection temperatures up to over 300°C with no additional thermal post-cure required, Figure 4 heat resistant material offers high rigidity and exceptional stability under extreme conditions.



## SPECIALTY MATERIALS

Figure 4 Production is compatible with 3D Systems' entire portfolio of NextDent® materials to facilitate full customization of dental devices. You can also choose from Figure 4 specialty materials for sacrificial tooling, jewelry casting, medical applications requiring biocompatibility and/or sterilization, and more.



See material selector guide and individual material datasheets for specifications on available materials.

## Sp 3D Sprint®

### End-to-end software solution for Figure 4 workflows

Figure 4 solutions use 3D Sprint, 3D Systems' advanced software for file preparation, editing, printing and management from a single, intuitive interface. 3D Sprint enables the customer to significantly decrease cost of ownership of their 3D printers by reducing the need for costly software seats by third party vendors. 3D Sprint automatically generates exceptionally efficient supports requiring far less material, which can lead to significant savings.

## Co 3D Connect™

### A new level of management in 3D production

3D Connect Service provides a secure cloud-based connection to 3D Systems service teams for proactive and preventative support to enable better service, improve uptime and deliver production assurance for your system.

Tall parts can be printed  
with Figure 4 Production



# Figure 4<sup>®</sup> Production

A customizable, fully-integrated solution for direct 3D production

PRINTER HARDWARE	
<b>Build Volume</b> (xyz)	124.8 x 70.2 x 346 mm (4.9 x 2.8 x 13.6 in)
<b>Throughput</b>	Up to 1 print job per minute (part geometry dependent)
<b>Resolution</b>	1920 x 1080 pixel
<b>Pixel Pitch</b>	65 microns (0.0025 in) (390.8 effective PPI)
<b>Wavelength</b>	405 nm
<b>Operating Environment</b>	24/7 operation design
Temperature	18-28 °C (64-82 °F)
Humidity (RH)	20-80%
<b>Electrical</b>	208/120 Vac, 3-phase Y, 60 Hz; 60A (max)
<b>Compressed Air</b>	90 psi min, 2 cfm, dry air
<b>Dimensions</b> (WxDxH)	
Control Cell crated	116.8 x 121.9 x 233.7 cm (46 x 48 x 92 in)
Control Cell uncrated	76.2 x 132 x 210.8 cm (30 x 52 x 83 in)
4-Print Engine Cell crated	116.8 x 121.9 x 233.7 cm (46 x 48 x 92 in)
4-Print Engine Cell uncrated	88.9 x 91.4 x 210.8 cm (35 x 36 x 83 in)
<b>Weight</b>	
Control Cell crated / uncrated	430.9 kg (950 lbs) / 363 kg (800 lbs)
4-Print Engine Cell crated / uncrated	408.2 kg (900 lbs) / 340 kg (750 lbs)

MATERIALS	
<b>Build Materials</b>	See material selector guide and individual material datasheets for specifications on available materials.
<b>Material Packaging</b>	9 kg click-in cartridges for automated replenishment; 2 per printer quad

SOFTWARE AND NETWORK	
<b>System Interface</b>	Ethernet, USB host
<b>Native File Format</b>	PXL native via 3D Sprint
<b>3D Sprint<sup>®</sup> Software</b>	Easy build job set-up, submission and job queue management; Automatic part placement and build optimization tools; Part nesting capability; part editing tools; Automatic support generation; Job statistics
<b>3D Connect<sup>™</sup> Software Capable</b>	3D Connect Service provides a secure cloud-based connection to 3D Systems service teams for proactive and preventative support.
<b>Client Hardware Recommendation</b>	<ul style="list-style-type: none"> <li>• 3 GHz multiple core processor (2 GHz Intel<sup>®</sup> or AMD<sup>®</sup> processor mini) with 8 GB RAM or more (4 GB mini)</li> <li>• OpenGL 3.2 and GLSL 1.50 support (OpenGL 2.1 and GLSL 1.20 mini), 1 GB video RAM or more, 1280 x 1024 (1280 x 960 mini) screen resolution or higher</li> <li>• SSD or 10,000 RPM hard disk drive (minimum requirement of 7 GB of available hard-disk space, additional 3 GB free disk space for cache)</li> <li>• Google Chrome or Internet Explorer 11 (Internet Explorer 9 mini)</li> <li>• Other: 3 button mouse with scroll, keyboard, Microsoft .NET Framework 4.6.1 installed with application</li> </ul>
<b>Client Operating System</b>	Windows <sup>®</sup> 7 and newer (64-bit OS)
<b>Input File Formats Supported</b>	STL, CTL, OBJ, PLY, ZPR, ZBD, AMF, WRL, 3DS, FBX, IGES, IGS, STEP, STP and X_T

NOTE: Not all products and materials are available in all countries – please consult your local sales representative for availability.

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2020 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. 3D Systems, the 3D Systems logo, Figure 4 and 3D Sprint are registered trademarks and 3D Connect is a trademark of 3D Systems, Inc.